

Tailored Biobased Resins from Acrylated Vegetable Oils for Application in Wood Coatings

Sabine Briede ^{1,*}, Oskars Platnieks ^{1,*}, Anda Barkane ¹, Igors Sivacovs ², Armands Leitans ³, Janis Lungevics ³ and Sergejs Gaidukovs ^{1,*}

¹ Institute of Polymer Materials, Faculty of Materials Science and Applied Chemistry, Riga Technical University, P. Valdena 3/7, LV-1048 Riga, Latvia; sabine.briede@rtu.lv (S.B.); anda.barkane@rtu.lv (A.B.)

² JSC Olaine Chemical Plant BIOLAR, Rupnicu 3, LV-2114 Olaine, Latvia; igors.sivacovs@biolar.lv

³ Department of Mechanical Engineering and Mechatronics, Faculty of Mechanical Engineering, Transport and Aeronautics, Riga Technical University, Kipsalas 6B, LV-1048 Riga, Latvia; armands.leitans@rtu.lv (A.L.); janis.lungevics@rtu.lv (J.L.)

* Correspondence: oskars.platnieks_1@rtu.lv (O.P.); sergejs.gaidukovs@rtu.lv (S.G.)

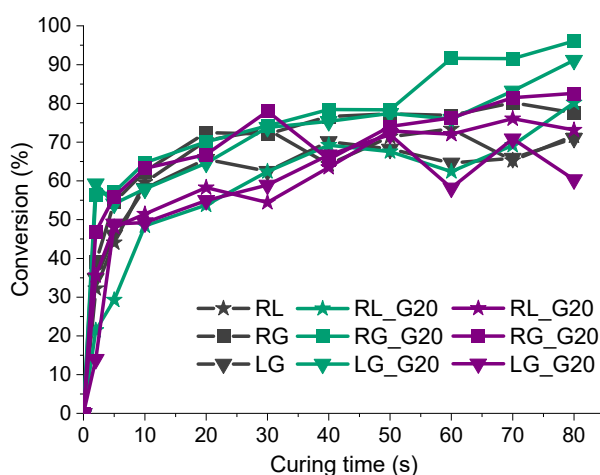


Figure S1. Conversion of acrylic double bonds in coating samples.

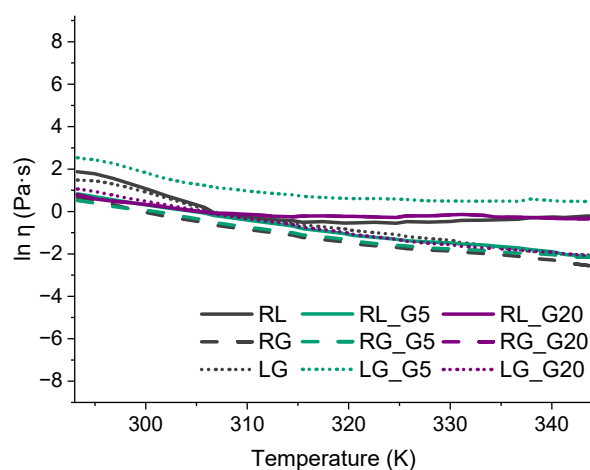


Figure S2. Viscosity and temperature relation for coating samples.

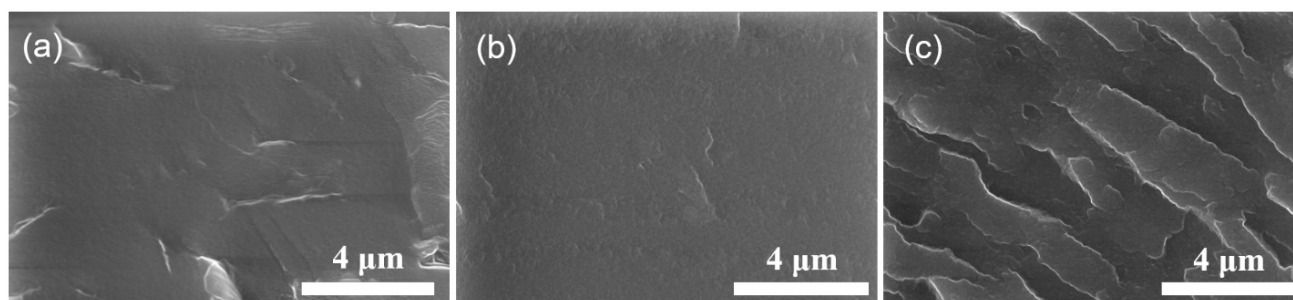


Figure S3. Cross-section SEM micrographs of the fracture surface morphology of (a) RL, (b) RL_G5 and (c) RL_G20 in 10,000× magnification.

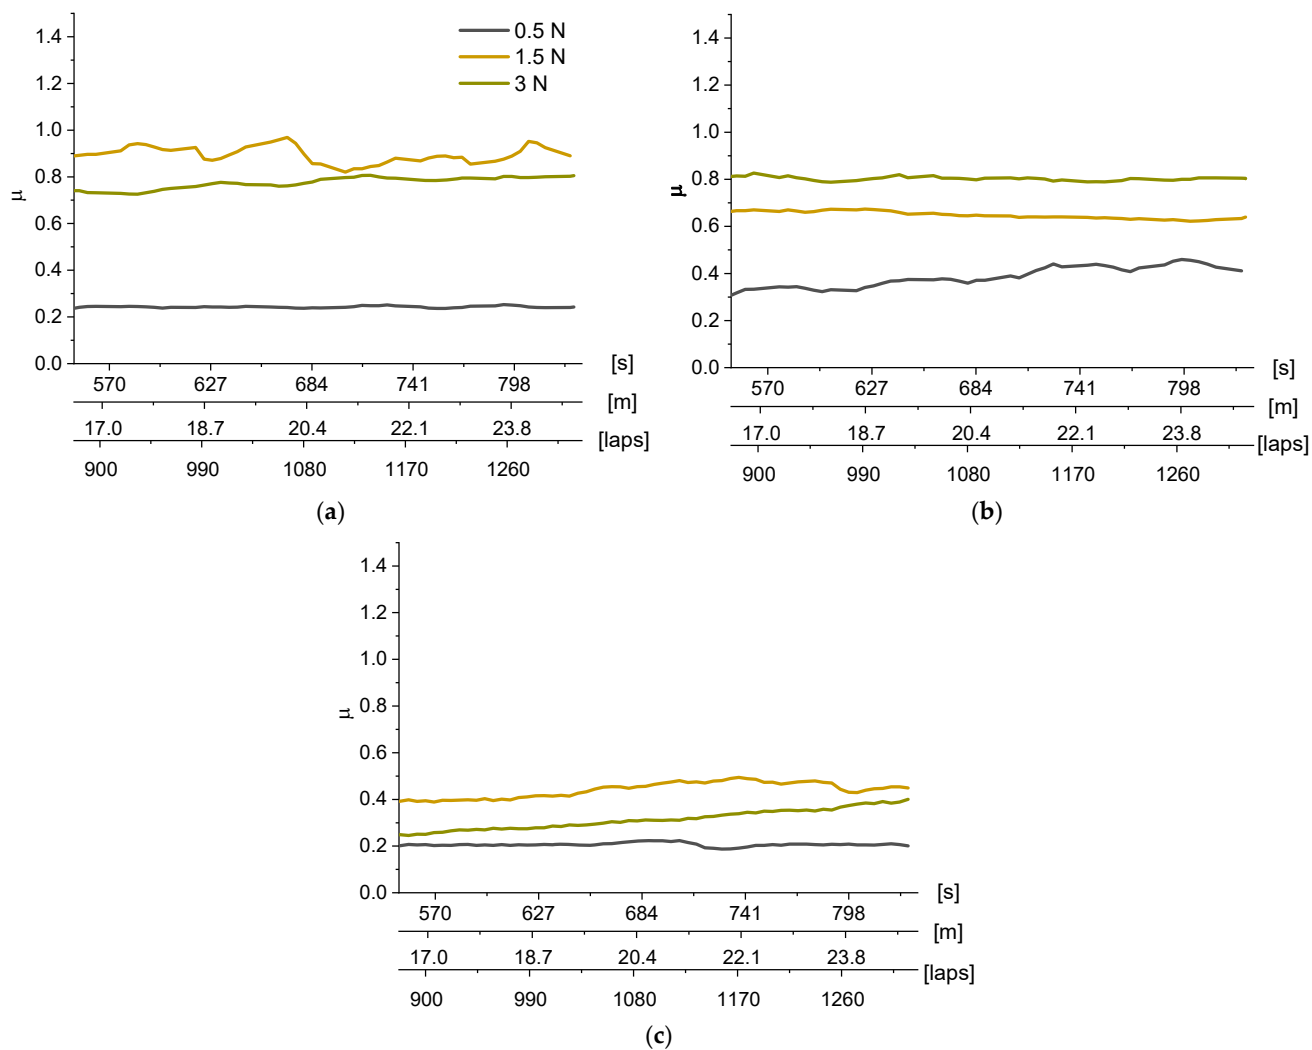


Figure S4. Photo-oxidized (9 h) coating friction coefficient dependence on applied indenter load, time, distance, and number of laps for (a) RL, (b) RL_G5, (c) RL_G20.